



RK0216/3020/3025\_Pxxx

## AC/DC 小功率反激变压器



### 典型特点


- ⊙ AC/DC 开关电源变压器
- ⊙ 高隔离: 3000V
- ⊙ 封装尺寸: 29.2x27.9mm
- ⊙ 拓扑: 反激

型号	电气性能 @ 25C- 工作温度 -40C to +125C			原理图	
PH0256NL EE16	初级电感量	(3-2)	2800 $\mu$ H $\pm$ 15%		
	漏感		65 $\mu$ H max		
	直流电阻	(3-2)	3.3		$\Omega$ Max
		(10-8)	0.02		
		(4-5)	0.13		
	隔离电压	Pri-Sec	500 Vrms		
	K1 系数		10100		
PLIC's	TNY264/274				
PH0259NL EE16	初级电感量	(4-1)	1800 $\mu$ H $\pm$ 15%		
	漏感		60 $\mu$ H max		
	直流电阻	(4,1)	2.556		$\Omega$ Max
		(5-6)	0.0168		
		(8-6)	0.174		
	隔离电压	Pri-Sec	500 Vrms		
K1 系数		7200			
适用芯片	TNY266/274				
PH0262NL EF20	初级电感量	(3-1)	790 $\mu$ H $\pm$ 10%		
	漏感	(3-1)	30 $\mu$ H max		
	直流电阻	(3-1)	1.085		$\Omega$ Max
		(4-5)	0.015		
		(10-9)	0.026		
	隔离电压	Pri-Sec			
	K1 系数		4030		
使用芯片	TNY279				






#### 机械尺寸

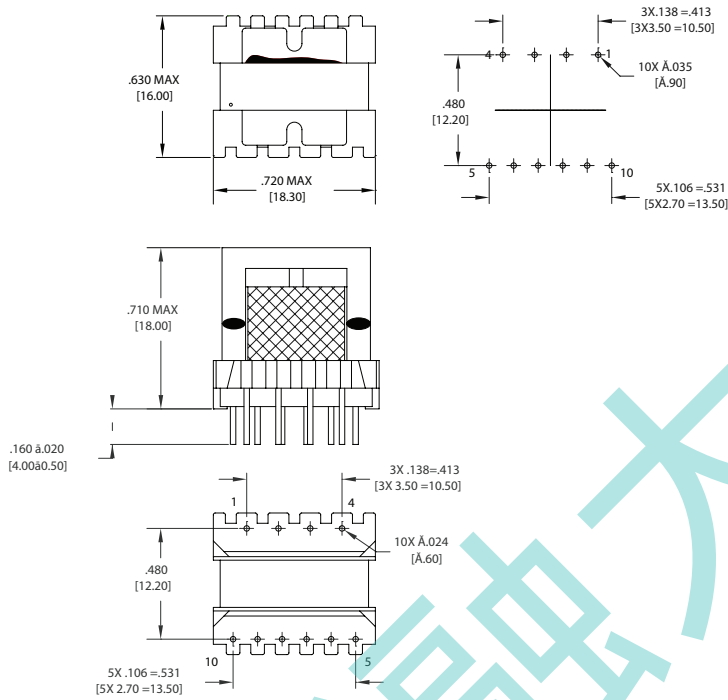

#### 机械尺寸

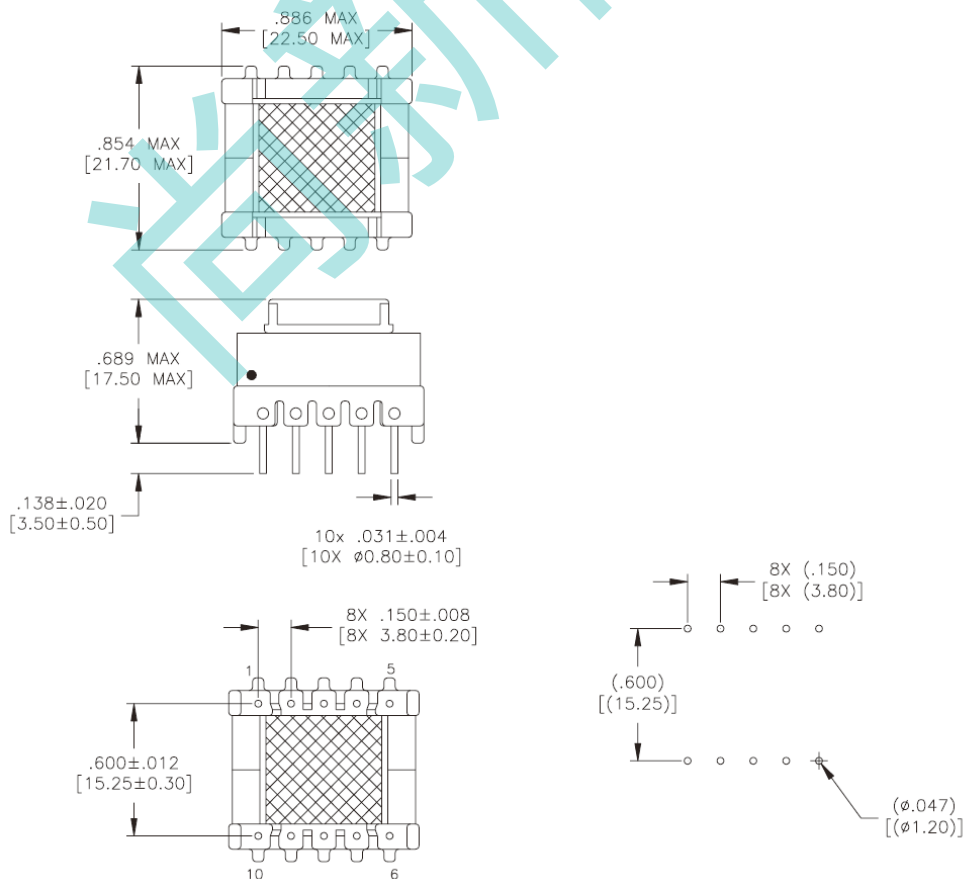



### 机械尺寸

