



RW2819\_P08xx

### ER19高频扁平绕圈正激变压器



#### 典型特点


- 功率: 至140W
- 高度: 最高 9.7mm
- 封装尺寸: 23.4x21.6mm
- 频率: 200kHz 至 700kHz
- 隔离电压: 1750V<sub>DC</sub>

电气性能 @ 25°C - 工作温度 -40°C to +125°C

型号	匝比			原理图	初级电感量 (μH MIN)	漏感电感量 (μH MAX)	直流电阻 (mΩ MAX)			最大高度 (mm)
	初级 A	初级 B	次级				初级 A	初级 B	次级	
RW2819_P0801	4T	4T	4T (1T:1T:1T:1T)	A1	153	0.45	17.5	17.5	7	8.6
RW2819_P0802	4T	5T			194	0.45	17.5	20	7	8.6
RW2819_P0803	5T	5T			240	0.55	20	20	7	8.6
RW2819_P0804	5T	6T			290	0.60	20	25	7	8.6
RW2819_P0805	6T	6T			345	0.65	25	25	7	8.6
RW2819_P0806	4T	4T	1T & 1T	A2	153	0.45	17.5	17.5	.875 & .875	8.6
RW2819_P0807	4T	5T			194	0.45	17.5	20	.875 & .875	8.6
RW2819_P0808	5T	5T			240	0.55	20	20	.875 & .875	8.6
RW2819_P0809	5T	6T			290	0.60	20	25	.875 & .875	8.6
RW2819_P0810	6T	6T			345	0.65	25	25	.875 & .875	8.6
RW2819_P0811	4T	4T	2T & 1T	A3	153	0.45	17.5	17.5	1.75 & 1.75	8.6
RW2819_P0812	4T	5T			194	0.45	17.5	20	1.75 & 1.75	8.6
RW2819_P0813	5T	5T			240	0.45	20	20	1.75 & 1.75	8.6
RW2819_P0814	5T	6T			290	0.50	20	25	1.75 & 1.75	9.7
RW2819_P0815	6T	6T			345	0.55	25	25	1.75 & 1.75	9.7



### 机械尺寸

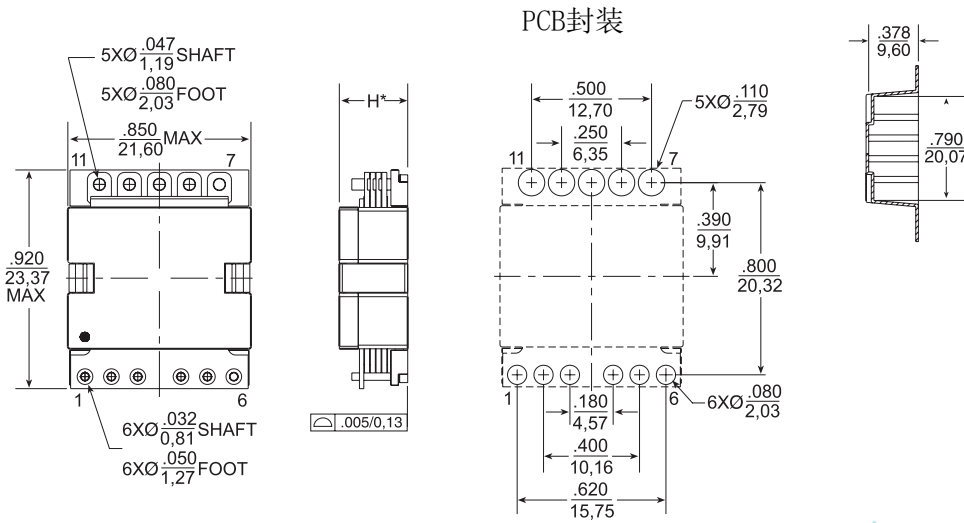

### 原理图

